



[Homepage](#) > [Products](#) > [RFID Antennas](#) > [865-870 MHz Reader Antennas](#) > **Dual Circular Antennas**

DUAL CIRCULAR ANTENNAS

MT-243008/NRLH
865-870 MHZ, 8.5 DBIC DUAL RHCP+LHCP READER ANTENNA



ELECTRICAL

REGULATORY COMPLIANCE	RoHS, CE 0682
FREQUENCY RANGE	865-870 MHz
GAIN	8.5 dBic (min)
VSWR	1.3:1 (typ) 1.4:1 (max)
POLARIZATION	DUAL RHCP+LHCP
3dB ELEVATION BEAMWIDTH	65° (typ)
3dB AZIMUTH BEAMWIDTH	60°(typ)
SIDELOBES LEVEL @ ± 90°	-12 dB (max)
F/B RATIO	-20 dB (max)
PORT TO PORT ISOLATION	-35 dB (min)
POWER	6W (max)
INPUT IMPEDANCE	50 (ohm)
AXIAL RATIO AT BORESIGHT	2.5 dB (max) 1.5 dB (typ)
LIGHTNING PROTECTION	DC Grounded

MECHANICAL

DIMENSIONS (LxWxD)	536x360x26 mm
CONNECTOR	2 xN-Type Female
WEIGHT	2.0 kg (max)
MOUNTING KIT	MT-120018
RADOME MATERIAL	Plastic UV Resistant per ETSI 300
BASE PLATE MATERIAL	Aluminum with chemical conversion coating
OUTLINE DRAWING	RD41885700C

ORIENTATION

Rectangular


[ADD TO COMPARE PAGE](#)[TO COMPARE PAGE](#)**ENVIRONMENTAL**

TEST	STANDARD	DURATION	TEMPERTURE	NOTES
LOW TEMPERATURE	IEC 68-2-1	72 h	-55°C	
HIGH TEMPERATURE	IEC 68-2-2	72 h	+71°C	
TEMP. CYCLING	IEC 68-2-14	1 h	-45°C +70°C	3 Cycles
THERMAL SHOCK NONO-OPERATING			-30°C to+70°C	Ramp 30°C/min
HUMIDITY	ETSI EN300-2-4 T4.1E	144 h		95%
WATER TIGHTNESS	IEC 529			IP54
DUST RESISTANCE				IP54
SOLAR RADIATION	ASTM G53	1000h		
OZONE RESISTANCE	ETSI 300			
FLAMMABILITY	UL 94			Class HB
QUASI RANDOM VIBRATION				20g rms for 4 hours
VEHICLE VIBRATION OPERATING	1 grms, 10-500 Hz, in 3 axis			6 hours total, 2 hr in each axis. Accelerated wear – an additional 50hrs in worst case axis.
MECHANICAL SHOCK OPERATING	10g,11msec, half sine pulse			


**AZIMUTH RADIATION PATTERN MIDBAND
FREQ. 0.867 GHZ**

**ELEVATION RADIATION PATTERN MIDBAND
FREQ. 0.867 GHZ**


MT_243008NRLH_PORT_1_AZ_PLANE Freq: .867 GHz

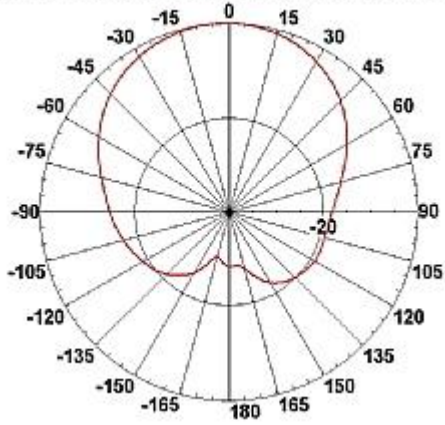




MT_243008NRLH_PORT_1_EL_PLANE Freq: .867 GHz

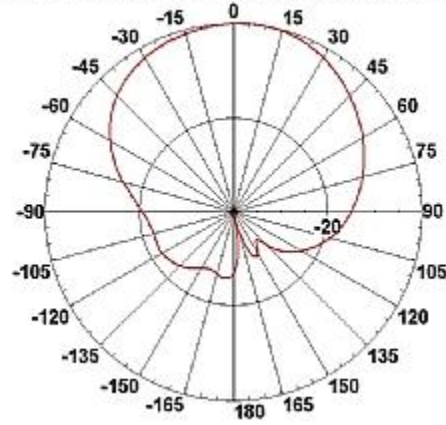

MT_243008NRLH_PORT_2_AZ_PLANE Freq: .867 GHz

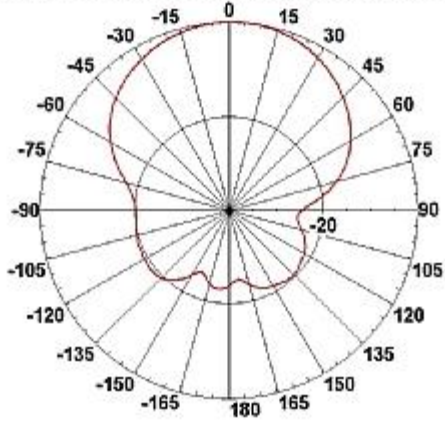

MT_243008NRLH_PORT_2_EL_PLANE Freq: .867 GHz

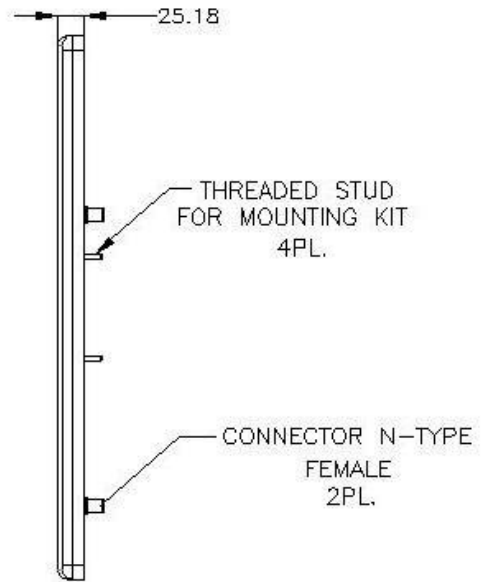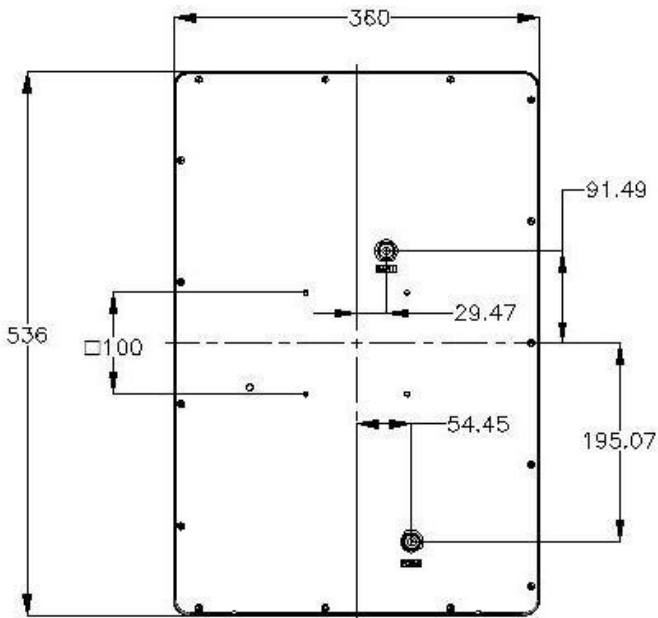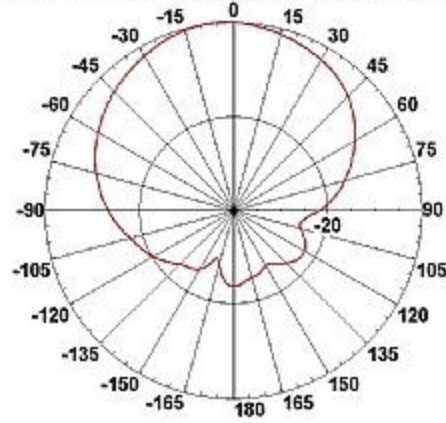

WAIVER!

While the information contained in this document has been carefully compiled to the best of our present knowledge, it is not intended as presentation or warranty of any kind on our part regarding the fitness of the products concerned for any particular use or purpose and neither shall any statement contained herein be

construed as a recommendation to infringe any industrial property rights or as a license to use any such rights. The fitness of each product for any particular purpose must be checked beforehand with our specialists.